

COOLVAC-2W

VENTURI VACUUM SYSTEM



- WORKS WITH PNEUMATIC COMPRESSED AIR
- ADAPTS TO STANDARD 205L (44 GALLON) DRUMS
- VIRTUALLY NO MAINTENANCE - QUIET OPERATION
- HIGH SUCTION RATE AT 45 L/PMIN (AT 50 PSI)



2-WAY SYSTEM TO REMOVE AND REFILL COOLANTS, OILS, SLUDGE, SWarf AND OTHER INDUSTRIAL WASTE!

FEATURES


COOLVAC-2W
VENTURI VACUUM SYSTEM

ROBUST AND DURABLE
ADAPTS TO ANY 205L (44 GAL) DRUM

HIGH DISCHARGE RATE AT
130 L/PMIN AT 100 PSI

HIGH SUCTION RATE AT
45 L/PMIN AT 50 PSI

AUTOMATIC SAFETY SHUTOFF
VALVE PREVENTS OVERFLOWS

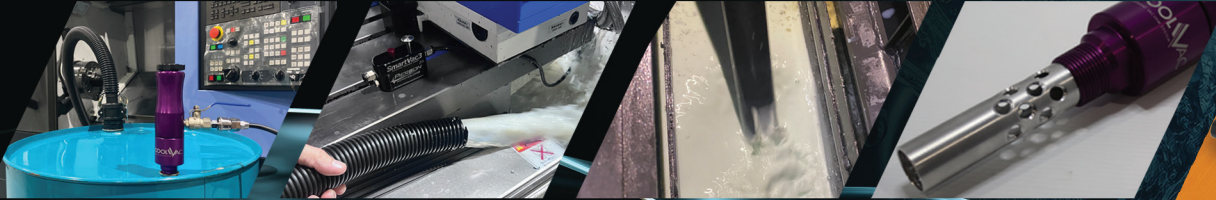


2 WAY DRUM VACUUM AND DISCHARGE SYSTEM

PERFORMANCE CHART

Air Pressure	Air consumption (L p/sec)	Suction Rate (L p/min)
50 (PSI)	6.5	45
75 (PSI)	4.8	75
100 (PSI)	9.2	100

**Not recommended to run under 50PSI*

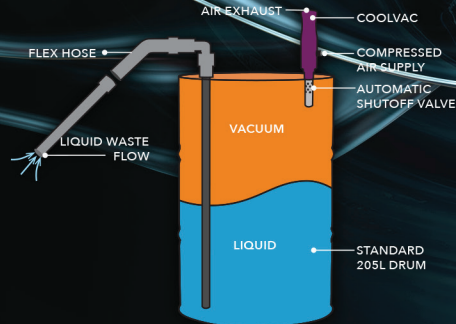

KIT CONTENTS

- 1 x COOLVAC Venturi Vacuum System
- 1 x Flex Hose
- 1 x Vacuum Wand
- 1 x Drum Fit Kit
- 1 x 2W Conversion Attachment
- 1 x Instructional Manual

DISTRIBUTED BY: